

**TraFFix
Devices Inc.**



SLED™ 
EURO-TERMINAL
 Sentry Longitudinal Energy Dissipater



Tested and Passed: EN1317-4 P4 Impact Speed: 110 Km/h Vehicle Type: 1500 kg Bullet Vehicle Impact Angle: 15° Side



Tested and Passed: EN1317-4 P4 Impact Speed: 110 Km/h Vehicle Type: 1500 kg Bullet Vehicle Impact Angle: Head-On Centre

- Transitions Attach to Existing Steel and Concrete Barrier Bolt Holes with No Modification Required
- Narrow Footprint is Ideal for Road Works on Streets and Motorways with Minimal Shoulder Spacing
- Internal Steel Cables Link all Components, Thereby Minimizing Vehicle Intrusion Into the Work Zone
- *SLED EURO-TERMINAL* Quickly and Easily Attaches to Steel and Concrete Mobile Safety Barriers
- *SLED EURO-TERMINAL* is Tested and accepted to European Crash Test Standard EN 1317-4 P4
- Quick and Easy Set-Up, No Foundation Anchoring, Minimized Installation Exposure Time, Ideal for Short Term or Emergency Maintenance and Detour Operations
- Visual Float Fill Indicator Caps Quickly Verify Water Module's are Properly Filled
- *SLED EURO-TERMINAL*'s Stout Design Virtually Eliminates Vaulting
- Cost Effective Terminal for the Treatment of Safety Barriers
- Short Length Reduces the Chance for Incidental Contact
- Containment Impact *SLED* (CIS) Minimizes Debris Field

Scan for Instant QR Video



www.traffixdevices.com

PRODUCT BULLETIN

SLED™ EURO-TERMINAL

Sentry Longitudinal
Energy Dissipater



Turn Down




Saving Lives with the SLED EURO-TERMINAL

SLED™ EURO-TERMINAL Sentry Longitudinal Energy Dissipater

The SLED EURO-TERMINAL is a narrow water filled attenuation device designed to shield the end of safety barriers in frontal and side impacts. The SLED EURO-TERMINAL's unique Containment Impact Sled (CIS), safely brings an impacting vehicle to a controlled stop and prevents the vehicle from vaulting, while containing the plastic debris within the steel CIS frame structure. The side safety panels and internal steel cables re-direct an impacting vehicle away from the blunt barrier end.

The SLED EURO-TERMINAL is the only free standing attenuation device that has been tested and accepted to EN1317-4 P4 requirements. Since the system is free standing, there are no pavement anchors, bolts or drilling to compromise the integrity of the roadway surface or bridge deck. The complete P4 SLED EURO-TERMINAL can be installed quickly with as little as one lorry and two workers and is designed to be placed on compacted dirt, gravel, decomposed granite, asphalt, or concrete.

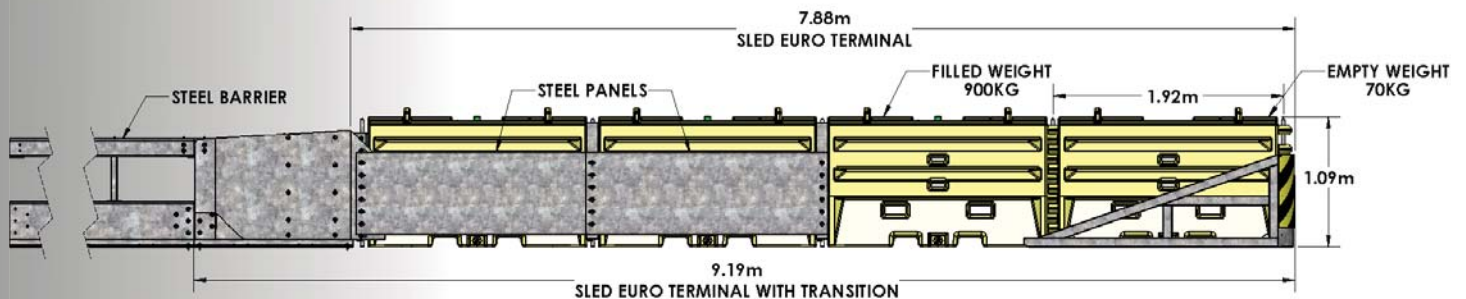

TT 2.1.100

Head on nose 1/4 offset to roadside
Vehicle Mass = 900 kg
Velocity = 100 Km/h

TT 1.3.110

Head on centre
Vehicle Mass = 1500 kg
Velocity = 110 Km/h

TT 4.3.110

Side, 15 degree
Vehicle Mass = 1500 kg
Velocity = 110 Km/h

TT 5.1.100

Side, 165 degree (reverse impact)
Vehicle Mass = 900 kg
Velocity = 100 Km/h

Traffix Devices is the first to produce a temporary device (EuroTerminal) to pass these tests for EN 1317-4 P4

**Traffix
Devices Inc.**



160 Avenida La Pata, San Clemente, CA 92673
(949) 361-5663 FAX (949) 361-9205
www.traffixdevices.com

Distributed by:

Gonneville Inc.

211 Calle Pintesresco Suite A
San Clemente, CA 92672

877-246-8015 sales@gonneville.com

www.gonneville.com